

HSUN Series

Hazardous Location/Explosion Proof LED

Product Description:

The HSUN Series LED Luminaire can be used in locations made hazardous by the presence of flammable vapors, gases or combustible dusts or fibers as defined by NEC, ATEK, IECEx. The HSUN Series can also be used in heavy duty environments where dust, water, vibration and corrosion exist. The housing is die-cast aluminum with a powder coat paint finish. Bolts and brackets are stainless steel. Pendant mount or side (feed through) is standard. An adjustable U-Bracket comes standard. The HSUN Series can also be pendant or side (feed through) mounted. The lens is flat tempered glass or glass with polycarbonate lens for different beam angles. Emergency battery backup is available.

Applications:

- Power Plants / Heavy Industrials
- Distillery, Alcohol
- Paper Mills / Wastewater Treatment Plants
- Loading Docks / Platforms / Shipyards
- Chemical Processing Facility
- Petrochemical Processing Facility
- Mining
- Ocean Marine
- LNG facilities
- Metal Industry



Features:

- 2ft and 4ft lengths available
- Meanwell Driver
- High efficacy: up to 140lm/W
- CRI > 70
- Standard 120-277V, Available options include
 - 277-480V
 - 12-36VDC
- Temp Rating -40°C to +60°C (140°F) (20-80W models)
- Temp Rating -40°C to +40°C (104°F) (90-120W models)
- Three connection cable entry
- Aircraft Aluminum Housing with Marine Die-Cast Powder Coat Finish
- Adjustable
- Standard 10KV surge protection
- Standard integrated junction box
- 1.5-3 Hour Emergency Operation (Option)
- 5 or 10 Year Limited Warranty (specify in part number)





Product Dimensions

2'

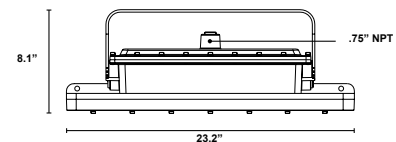

4'

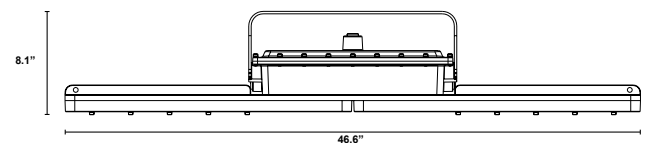

Note

**Housing dimensions change when Emergency function is selected in the ordering guide. Please contact Your Lighting Rep for Emergency operation housing dimensions.

Compliance

UL 844 Hazardous Locations North America

- Class I, Division 1, Group C, D
- Class I, Division 2, Groups A, B, C & D
- Class II, Division 2, Groups F & G
- Class III

Marking Atex

- II2 G Ex db op is IIB T4/T5 Gb
- II2 D Ex op is tb IIIC T135°C Db IP66

Marking ICEx

- Ex db op is IIB T4/T5 Gb
- Ex op is tb IIIC T135°C Db

Marking Marine

- UL1598, UL1598A
- ABS

Other Markings / Standards


- UL 1598 Wet Locations
- UL 8750 LED Safety
- DLC Listed
- CSA C22.2 No. 250.0-08
- CSA C22.2 No. 137-M1981



5 Year and 10 Year Warranties Available

BAA and TAA available. Contact factory for more information and pricing.


Light Distribution

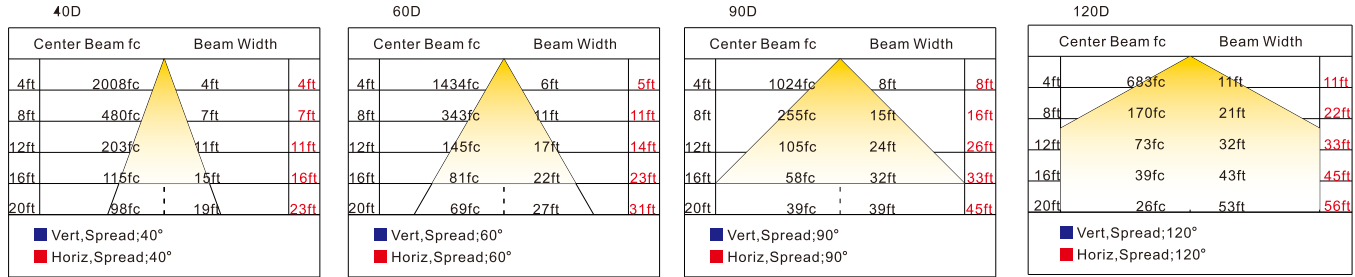

Lumen Chart

| | 3500K | 4000K | 5000K | 5700K |
|-------------|-----------|-----------|-----------|-----------|
| 20W | 2,000 lm | 2,560 lm | 2,700 lm | 2,800 lm |
| 30W | 3,600 lm | 3,840 lm | 4,050 lm | 4,200 lm |
| 40W | 4,800 lm | 5,120 lm | 5,400 lm | 5,600 lm |
| 50W | 6,000 lm | 6,400 lm | 6,750 lm | 7,000 lm |
| 60W | 7,200 lm | 7,680 lm | 8,100 lm | 8,400 lm |
| 80W | 9,600 lm | 10,240 lm | 10,800 lm | 11,200 lm |
| 100W | 12,000 lm | 12,800 lm | 13,500 lm | 14,000 lm |
| 120W | 14,400 lm | 15,360 lm | 16,200 lm | 16,800 lm |

Ordering Guide

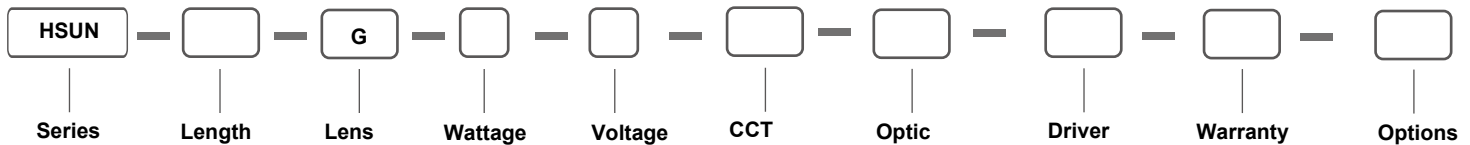

| LENGTH | LENS | WATTAGE | VOLTAGE | COLOR TEMP | OPTIC | DRIVER | WARRANTY | OPTION |
|---------|----------|-----------|---------------|------------------------|----------|-------------------|---------------------------|--------------------------------------|
| 2' = 2' | G= Glass | 2 = 20W | A=AC 100-277V | S ² = 3000K | R = 120° | D = Dimmable | 5Y = Five Year Std | EM ³ =90 Minute Emergency |
| 4 = 4' | Flat | 3 = 30W | B=AC 277-480V | I = 4000K | | ND = Non-Dimmable | 10Y* = Ten Year Warranty* | Opertation |
| | | 4 = 40W | C=DC 12-36V | C = 5000K | | | | CL = Cable Length |
| | | 5 = 50W | | K = 6000K | | | | (Specify Length) |
| | | 6 = 60W | | | | | | OPEB = Junction Box |
| | | 8 = 80W | | | | | | BAA** = Buy American Act |
| | | 10 = 100W | | | | | | Compliant** |
| | | 12 = 120W | | | | | | TAA** = Trade Agreements Act |
| | | | | | | | | Compliant** |

Notes


- 2' Version available in 20W / 30W / 40W / 50W / 60W.
- Contact factory for customer color temperatures (<3000K / >6000K).
- Operating Temperature Emergency Function:
 - 40C to +55C (131°F) (20-80W models)
 - 40C to +40C (104°F) (90-120W models)

**Please contact factory for BAA and TAA options.


⚠ WARNING
Risk of fire, Electric shock or personal injury
Please turn off power before installation!



Chain Mounting

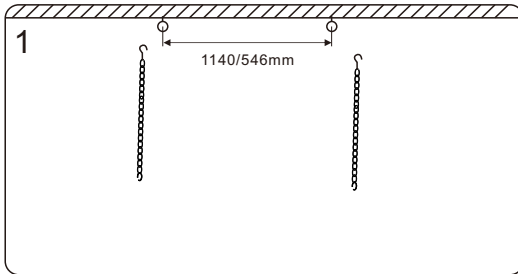


1. Drill 2x hole for hanging ring(1140mm for 4FT fixture or 546mm for 2FT fixture), and fixing them.

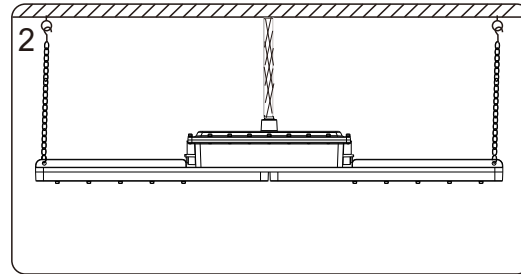


2. Fix the hanging chain to light fixture. Wire the cable through the metal conduit and then connect it with the power.

Pole Mounting

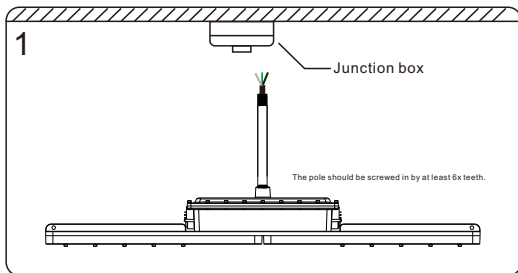


1. Wire the cable through the pole and then install the pole to the fixture.

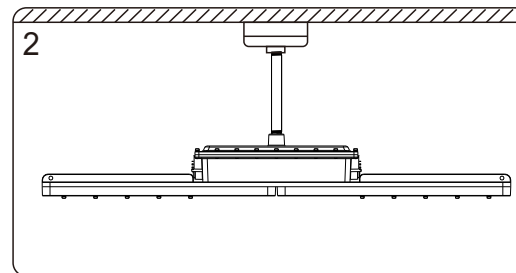


2. Wire the cable to enclosure of junction box and install the pole to junction box.

Bracket Mounting

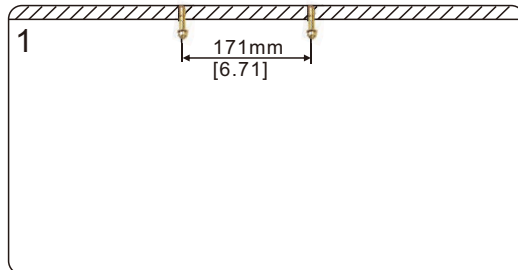


1. Drill 2x Ø15 holes for expanded screws, and fix them to the ceiling.

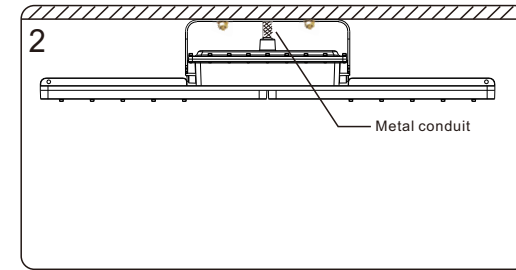


2. Install the fixture to the expanded screws, and tighten the nuts. (Metal conduit need to apply here)

Pole Bracket Mounting

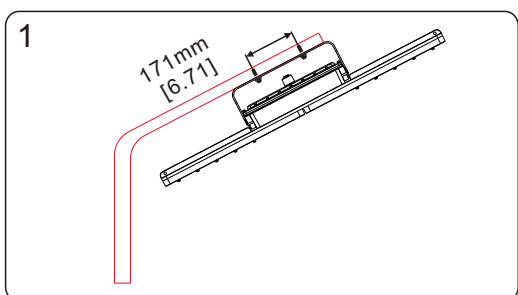


1. Drill 2x Ø15 holes for fixing screws.

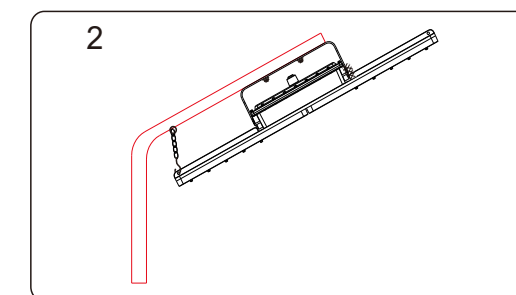


2. Fix the pendant chain and hook the fixture. Insert 2x Ø15 fixing screws and weld them on the pole bracket with the fixture.

Wall Mounting

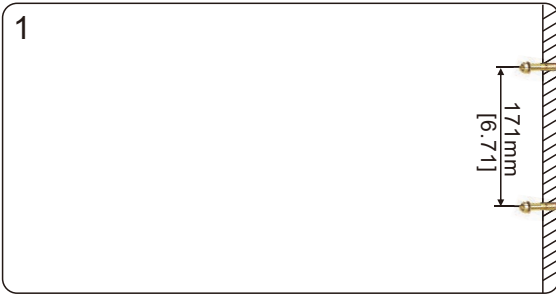

1. Drill 2x Ø15 hole for expanded screws, and fix them to the wall. (Horizontal distance: 171mm)

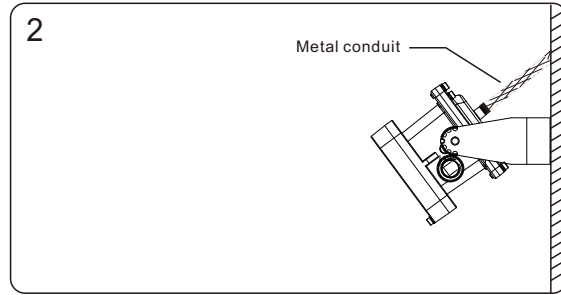

2. Install the fixture to wall and connect the wire to AC power. (Metal conduit needs to apply here)

Packing Information

| Model | Quantity/Ctn | Length (in) | Width (in) | Height (in) | Fixture weight (lbs) | Gross weight (lbs) |
|-------|--------------|-------------|------------|-------------|----------------------|--------------------|
| 2' | 1 | 30 | 13 | 10 | 28 | 32 |
| 4' | 1 | 53 | 13 | 10 | 41 | 47 |

Accessories



- Model: X-J1
Name: Junction Box
Material: Cast Aluminum



- Model: X-CHAIN
Name: Pendant Chain
Material: Stainless Steel S30400

Installation Manual

READ INSTRUCTIONS CAREFULLY BEFORE INSTALLING. KEEP THIS INSTRUCTIONS FOR FUTURE REFERENCE. Fixtures must be wired in accordance with the National electrical code and all applicable local codes. Proper grounding is required for safety.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY QUALIFIED ELECTRICIAN WHO IS FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDOUS INVOLVED.

Warning: Risk of fire or electric shock. Linear light installation requires knowledge of luminaires and electrical systems. DO NOT open the enclosure when energized. DO NOT try to install if not qualified. Please contact a professional electrician.

Warning: Risk of fire or electric shock. Suitable for wet locations. Make sure the power is off prior to installation.

Warning: Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.

Warning: DO NOT install in unstable, loose or breakable surfaces.

Warning: DO NOT let objects impact or exert force on the surface of the fixture.