



Job Name: _____

Type: _____

Part #: _____

Notes: _____

COBRA 3

SPECIFICATIONS

The LSL Cobra 3 maintains efficient AC Emergency Power to operate all emergency lighting fixtures at "full-light" output after the transfer is complete, providing superior dependability and security to commercial/industrial environments in a small footprint.

POWER RATING

- 3 KW - 125 KW (or 3,000 Watts - 125,000 Watts) three phase output unit uses the latest DSP/PWM technology to provide the most advanced performance and reliability features

INPUT

- 208Y/120, 480Y/277, 208 or 480VAC input 60Hz

OUTPUT

- 208Y/120 or 480Y/277VAC
Stand-by design is $\geq 99\%$ efficient at 100% linear load

BATTERIES


- Sealed, maintenance-free, lead calcium (AGM) batteries
- 10-Year prorated warranty
- Smart Battery Monitoring System is **TEMPERATURE COMPENSATED** maintaining maximum runtime and battery life
- Microprocessor controlled recharge and DSP/PWM overcharge protection standard

LAMPS AND LOADS

- Emergency power provides **FULL LIGHT OUTPUT** from all lamps and fixtures for the entire runtime
- Operates fluorescent, compact fluorescent, incandescent, quartz, LED and other lamp types
- Standard or electronic ballasts, dimming devices or panels, sensors and most control equipment
- Standard or LED Exits and other safety equipment

CODES

- UL 924, UL 1778, meets NFPA 101, NFPA 70, NEC and OSHA standards
- Cities of Chicago and New York approved
- Complies with the Buy American Act

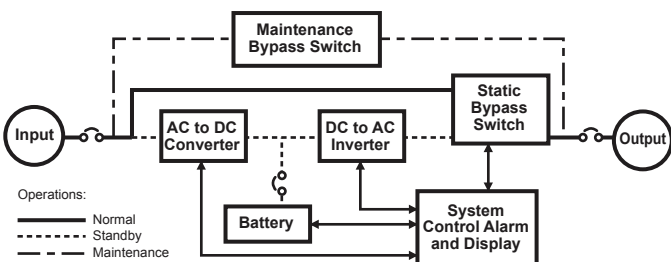

3 KW - 125 KW

Three Phase

Stand-By
Emergency
Lighting and
Power
Systems



PROTECTION

- Provides overload, surge and undercurrent protection using our technology and The Watchdog© software protect system performance and reliability
- Transfer in 16msec - 60msec

DIAGNOSTICS AND MAINTENANCE

- Our technology and The Watchdog© software provides complete self diagnostic capabilities and LED Monitoring
- Informative advanced Display and Alarms keep you in control of your emergency lighting environment 24/7
- Automatically performs periodic self-tests ensuring a safely lighted environment prior to an emergency
- Single point of testing instead of multiple testing points with battery packs

CABINET

- Modular design enables flexible installation
- Forced air cooling for maximum reliability
- All systems are self contained and require external battery cabinet(s)

INSTALLATION

- Modular design and small footprint allow easy installation in electrical closet or other convenient locations
- Phone assisted factory start-up standard for all systems
- Extended warranty available

SPECIAL APPLICATIONS

- LSL 24/7 offers numerous UL924 optional devices to meet unusual or difficult application parameters
- ECM - Environmental Circuit Module allows fixtures and lamps on the emergency circuit(s) to be operated by normal switching and/or dimming devices in NON-emergency conditions Dimming Panel Interface allows use with emergency lights controlled by common dimmer panel

WARRANTY

- 1-Year full warranty on system electronics
- Battery warranty 1-year with 9-years prorated
- System 1-year on-site warranty labor with MFG phone assisted start-up
- 5-Year powertrain warranty
- Maintenance contracts available



Job Name: _____

Type: _____

Part #: _____

Notes: _____

Cobra 3 Series	Power Rating	UPS Cabinet Dimensions			Battery Cabinet Dimensions				Weight (combined) (lbs)	British Thermal Unit (BTU's)	Battery Type	Voltage (VAC)		Output Protection	Safety Approvals
		W	H	D	No.	W	H	D				Input	Output		
LSCO3	3	42"	71"	22.5"	not required				980	102	Sealed, Maintenance free (AGM) lead calcium	Input and output circuit breakers standard	UL924 UL1778 NFPA 101 NFPA 70 NEC		
	4.5	42"	71"	22.5"	not required				1100	153					
	6	42"	71"	22.5"	not required				1350	204					
	8	42"	71"	22.5"	1	42"	71"	22.5"	1700	272					
	10	42"	71"	22.5"	1	42"	71"	22.5"	2250	340					
	12	42"	71"	22.5"	1	42"	71"	22.5"	2700	408					
	16	42"	71"	22.5"	1	42"	71"	22.5"	2950	544					
	20	42"	71"	22.5"	2	42"	71"	22.5"	3800	680					
	24	42"	71"	22.5"	2	42"	71"	22.5"	4350	816					
	30	42"	71"	22.5"	2	42"	71"	22.5"	5150	1020					
	40	42"	71"	22.5"	3	42"	71"	22.5"	6790	1360					
	50	42"	71"	22.5"	3	42"	71"	22.5"	8384	1700					
	60	50"	71"	32"	Consult Factory					2040					
	80	50"	71"	32"	Consult Factory					2720					
	100	50"	71"	32"	Consult Factory					3400					
125	50"	71"	32"	Consult Factory					4250						

The *Cobra 3* provides the simplicity and reliability that is critical when providing an alternative source of power to any environment. Easy installation ...”simplicity”...connect the LSCO3 to the emergency circuit(s) and everything is backed up...”reliability”...during a power outage. All lighting connected to the LSCO3 will simply continue to operate at “full light output” once transfer is complete. The Watchdog© software keeps your environment safe while self-diagnostics help maintain equipment to a high standard. Superior surge suppression assures the highest quality of power being delivered to all loads, all the time.

We sincerely hope you never experience a real emergency, but if you do, you deserve the **security, safety and peace of mind** that the *Cobra 3* from **LSL 24/7** ensures.

ORDERING INFORMATION

Choose the bold face catalog nomenclature that best suites your needs.

Write them on the appropriate line. Order accessories as separate catalog number.

Example:

LSCO3 - 12.0 - 208Y/120 208Y/120- EMB OCB/120/3/20/1 - 240

Description of example:

(12.0 KW, 208Y/120 Voltage In, 208Y/120 Voltage Out, External Maintenance Bypass Switch, 3 Output 120 Voltage Circuit Breakers at 20amps, 2 pole, 240 minute run time)

LSCO3

FAMILY	POWER RATING	VOLTAGE ¹	OPTIONS	TIME ³
	<u>KW</u>	<u>Input - Output</u>	<u>ECM120</u> - 120V Environmental control module ² / qty	<u>Minutes</u>
	3.0	208Y/120 - 208Y/120	<u>ECM277</u> - 277V Environmental control module ² / qty	5
	4.5	480Y/277 - 480Y/277	<u>NOF</u> - Normally OFF output circuit/voltage / qty/pole	10
	6.0	208 - 208Y/120	<u>NOH</u> - Normally OFF "Hold ON"/voltage/qty/pole	15
	8.0	208 - 480Y/277	<u>OCB</u> - Output circuit breakers / voltage / quantity/amps/pole	20
	10.0	480 - 208Y/120	<u>EPO</u> - Emergency power off	25
	12.0	480 - 480Y/277	<u>RSSP</u> - Remote Indicator Panel	30
	16.0		<u>SNMP</u> - SNMP Card	45
	20.0		<u>FC</u> - Form C Contacts	60
	24.0		<u>SRB</u> - Seismic rated bracket	90 (Standard)
	30.0		<u>STU3</u> - Onsite start-up	120
	40.0		<u>IDB</u> - Internal dimmer bypass	180
	60.0		<u>EMB</u> - External maintenance bypass switch	240
	80.0		<u>EW</u> - Extended warranty	
	100.0		<u>FT</u> - Fast transfer	
	125.0			

NOTES:

1-Consult factory for other voltage requirements. Special voltages may effect the weight, size and number of cabinets.

2-One ECM is used per switching device or circuit.

3-Consult factory for other run times.