


Job Name: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Part #: \_\_\_\_\_  
 Notes: \_\_\_\_\_

# HDL2 Dock Light



Integrated LED Technology

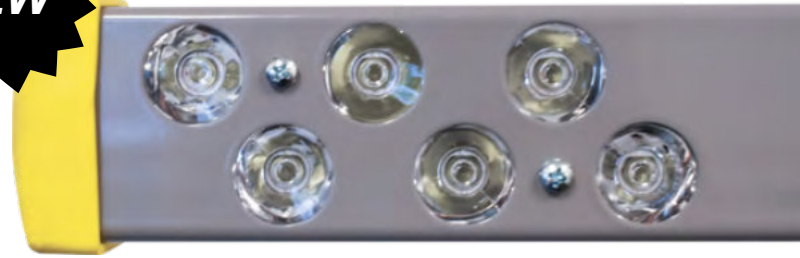

## Model Numbers

24" Integrated LED Loading Dock Arm  
HDL2SA-IL-24




36" Integrated LED Loading Dock Arm  
HDL2-SA-IL-36



40" Integrated LED Loading Dock Arm  
HDL2DA-IL-40



48" Integrated LED Loading Dock Arm  
HDL2DA-IL-48



60" Integrated LED Loading Dock Arm  
HDL2DA-IL-60



Integrated LEDs are built into the dock arm —no light head required!



Made in USA Patented Design






## Specifications

Wattage	13.4W
Power Source	120V,60Hz
Lumens	1331
Beam Angle	10°
CRI	≥75
CCT	5000K
Life	100,000hoursat 70% lumen maintenance
Compliances	cULus listed, LM79report available upon request
Warranty	3years

## Single Arm Lengths

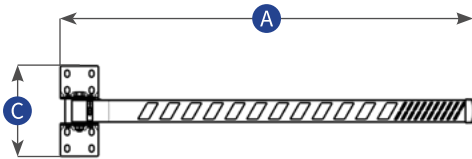

## Double Arm Lengths

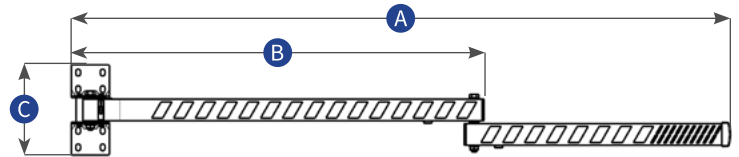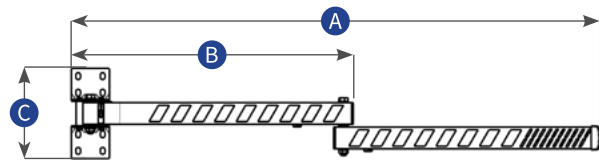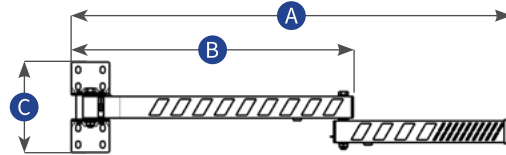

Model	A	B	C	D	Accessories
HDL2-SA-IL-24(24" Single Arm)	24 in (610 mm)	N/A	8.5 in (216 mm)	8.5 in (216 mm)	N/A
HDL2-SA-IL-36(36" Single Arm)	36 in (915 mm)	N/A	8.5 in (216 mm)	8.5 in (216 mm)	N/A
HDL2-DA-IL-40(40" Double Arm)	40 in (1016 mm)	24 in (610 mm)	8.5 in (216 mm)	8.5 in (216 mm)	N/A
HDL2-DA-IL-48(48" Double Arm)	48 in (1219 mm)	24 in (610 mm)	8.5 in (216 mm)	8.5 in (216 mm)	N/A
HDL2-DA-IL-60(60" Double Arm)	60 in (1524 mm)	36 in (915 mm)	8.5 in (216 mm)	8.5 in (216 mm)	N/A

## Model Numbers *Arm & Head Selection Required for Full Fixture*

24" Loading DockArm  
HDL2SA-24



Heavy Duty LED Light Head  
HDL2 (no switch)  
HDL2-S (switch)

Heavy Duty  
LED Light Head



36" Loading DockArm  
HDL2SA-36



Polycarbonate LED Light Head  
PL2 (no switch)  
PL2-S (switch)

Polycarbonate  
LED Light Head



40" Loading DockArm  
HDL2DA-40



3-Speed Fan  
DLFAN

3-Speed Fan



48" Loading DockArm  
HDL2DA-48



60" Loading DockArm  
HDL2DA-60





## Specifications




Wattage	13.4W
Power Source	120V,60Hz
Lumens	1331
Beam Angle	10°
CRI	≥75
CCT	5000K
Life	100,000 hours at 70% lumen maintenance
Material	Cast aluminum (HDL2, HDL2-S); Polycarbonate (PL2, PL2-S)
Compliances	cULus listed, IP66 rated (HDL2), LM79 report available upon request
Warranty	3years

Made in USA Patented Design

## Single Arm Lengths

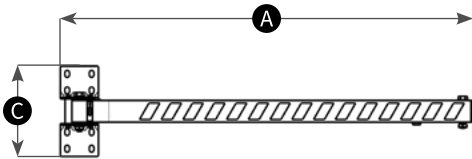

## Double Arm Lengths

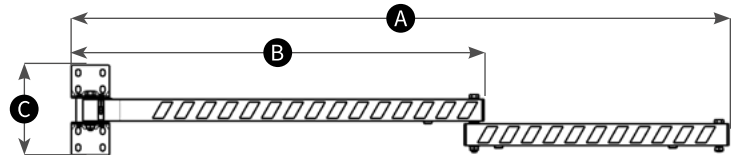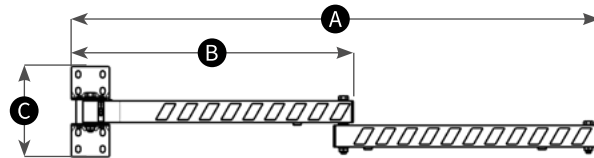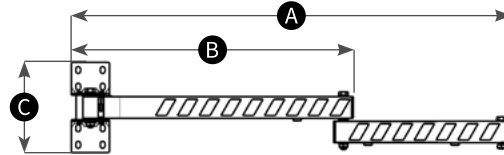

Model	A	B	C	D	Accessories
HDL2-SA-24(24" Single Arm)	24 in (610 mm)	N/A	8.5 in (216 mm)	8.5 in (216 mm)	HDL2, HDL2-S, PL2, PL2-S, DLFAN
HDL2-SA-36(36" Single Arm)	36 in (915 mm)	N/A	8.5 in (216 mm)	8.5 in (216 mm)	HDL2, HDL2-S, PL2, PL2-S, DLFAN
HDL2-DA-40(40" Double Arm)	40 in (1016 mm)	24 in (610 mm)	8.5 in (216 mm)	8.5 in (216 mm)	HDL2, HDL2-S, PL2, PL2-S, DLFAN
HDL2-DA-48(48" Double Arm)	48 in (1219 mm)	24 in (610 mm)	8.5 in (216 mm)	8.5 in (216 mm)	HDL2, HDL2-S, PL2, PL2-S, DLFAN
HDL2-DA-60(60" Double Arm)	60 in (1524 mm)	36 in (915 mm)	8.5 in (216 mm)	8.5 in (216 mm)	HDL2, HDL2-S, PL2, PL2-S, DLFAN