

# HFL55 LED Series

## Flight Light LED Series

This covered wall unit is designed to provide maximum lumen output in areas such as hallways, bathrooms, kitchens, stairways, and hospitals. An assortment of options in either single or double lamp allows this utility wall and surface mounted unit to satisfy a variety of lighting needs.

### Construction:

Housing is designed from heavy gauge die formed steel and finished in either baked white enamel or polyester powder coating. Socket plate is riveted to housing adding to the structural support of the fixture. Durayl LED Acrylic lens. End plates are attached by acorn nuts and secure the lens to the fixture.

### Electrical:

All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp location

M 59006648

### Mounting

Unit is equipped with holes and 7/8" knockouts in housing for surface mounting. Fixture may be mounted individually or with optional joiner bands may be used in a continuous run.

### Warranty & Listings



- 5-year warranty of all electronics and housing.
- UL Certified for damp location



### DIMENSIONS



•24" 46" 48" Standard Lengths (X)  
(or custom lengths available upon request)

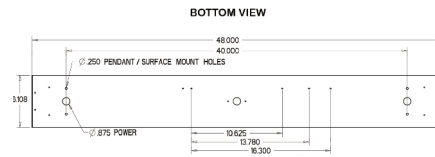

### Ordering Guide:

Max weight = 12lbs / 48"

HFL55 - LED

Series  
HFL55- LED

Size  
18 = 18"

2 = 2FT  
3 = 3FT  
4 = 4FT

Lumens  
2FT

3166 (17W)  
4350 (24W)  
5470 (31W)  
6452 (39W)

Color  
3K  
35K  
4K  
5K

Options

EMB= emergency driver  
OCC-E = External Occupancy Sensor  
OCC-I= Internal Occupancy sensor  
BI-LEV= Bi-level dimming system  
O = grounded outlet  
TOG = Toggle Switch  
PULL= Pull chain switch  
NL= Night Light

\*0-10v low voltage dimming standard per fixture

\*Higher and custom lumen packages available upon request

\*Call Factory for lumen options of 18" and 3FT models

4FT  
3159 (20W)  
4480 (30W)  
5684 (42W)  
6318 (40W)  
8960 (60W)  
11368 (84W)