

## HPLU Series

### Hazardous Location LED Luminaire

#### Product Description:

The HPLU Series LED Luminaire can be used in locations made hazardous by the presence of flammable vapors, gases or combustible dusts or fibers as defined by NEC, ATEX, IECEx. The HPLU series housing is die-cast aluminum and bolts / brackets are stainless steel. Pendant mount is standard along with U-bracket wall mount. The lens is polycarbonate spherical lens. Emergency battery backup is available.

#### Applications:

- Power Plants / Heavy Industrials Storage Facility
- Paper Mills / Wastewater Treatment Plants
- Loading Docks / Platforms / Shipyards
- Chemical Processing Facility
- Petrochemical Processing Facility
- Mining
- Ocean Marine
- LNG facilities
- Metal Industry
- Food & Alcohol, distilling



#### Features:

- Replaceable Drive & LED's
- U Bracket Standard (for wall mounting)
- Pendant Mount standard
- Dimmable and non-dimmable options available.
- Emergency battery backup available (adds to height)
- Standard 120-277V, Available options: 277-480V, 37VDC
- 2000-11,200 Lumens
- Buy American option (BAA, TAA)
- **Housing:** A383 Die Cast Aluminum
- **Gasketing:** Fluorosilicone Rubber
- **Hardware:** Stainless Steel
- **Finish:** Polyester Powdercoat
- **Lens:** Polycarbonate option flat glass
- **Expected Life:** Over 85,000 hrs.
- **Rating:** IP66 & IK10
- **Color Rendering Index (CRI):** 70
- **Operating Temp:** -40°C – +60°C
- **Relative Humidity:** 10-90% RH
- **Power Factor:** >.95
- **Input Line Voltage:** 90-305 / 200-525 VAC
- **Input Line Frequency:** 50/60 Hz
- **LED Chips:** Philips
- **Driver:** Meanwell
- **Surge Protection:** 10KV
- **DC Output Ripple & Noise:** <200mVP-P
- **T-Rating:** T3





#### Product Dimensions




20W

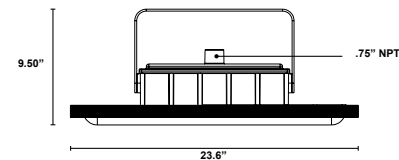

40W - 50W - 60W

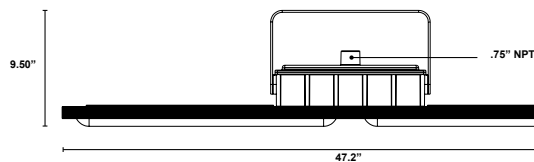

#### Mounting

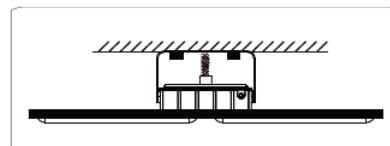

## Compliance

### UL 844 Hazardous Locations North America


- Class I, Division 2, Groups A, B, C, D
- Class II, Division 1, Groups E, F, G
- Class II, Division 2, Groups F, G
- Class III

### Marking Atex

- II3 G Ex ec IIC T5/T6 Gc
- II2 D Ex tb IIIC T80/100°C Db IP66

### Mounting Accessories

OPEB: Junction Box



### Marking ICEX

- Ex ec IIC T5/T6 Gc
- Ex tb IIIC T80/100°C Db IP66



### Marking Marine

- UL1598, UL1598A
- ABS

### Other Markings / Standards

- IP66

## Dimensions Battery Back up

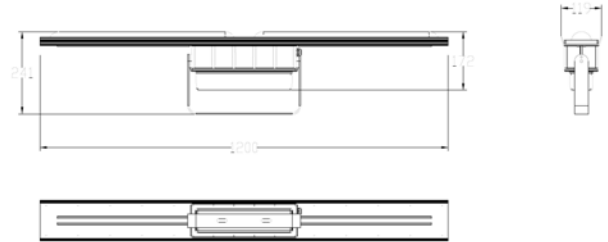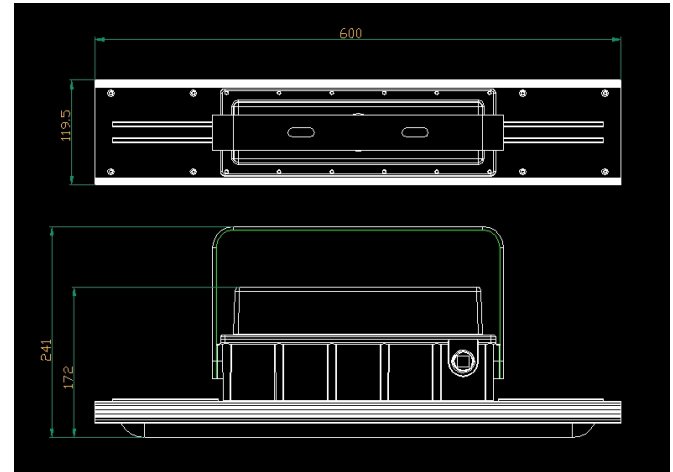

## Photometric

120D


	Center Beam fc	Beam Width	
10ft	25fc	30ft	34ft
20ft	6fc	59ft	67ft
30ft	3fc	89ft	100ft
40ft	1fc	148ft	134ft
50ft	0.6fc	178ft	168ft

■ Vert, Spread; 120°  
■ Horiz, Spread; 120°

## Lumen Chart

	3500K	4000K	5000K
20W	2,000 lm	2,560 lm	2,800 lm
40W	4,800 lm	5,120 lm	5,600 lm
60W	7,200 lm	7,680 lm	8,400 lm
80W			11,200 lm

## Ordering Guide

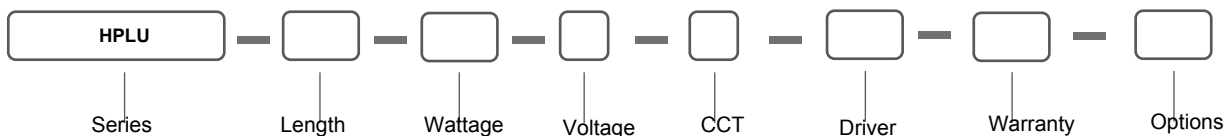

SERIES	LENGTH	WATTAGE	VOLTAGE	COLOR TEMP	DRIVER	WARRANTY	OPTION
HPLU	2' = 2' 4 = 4'	2 = 20W 4 = 40W 6 = 60W 8 = 80W	LV = 100-277V HV = 277-480V	S <sup>2</sup> = 3000K I = 4000K C = 5000K K = 6000K	D = Dimmable ND = Non-Dimmable	5Y = Five Year 10Y* = Ten Year Warranty*	S= Motion Sensor EM <sup>2</sup> = 90 Minute Emergency OPEB= Operation Junction Box BAA= Buy American Act Compliant** TAA= Trade Agreements Act Compliant**

### Notes

1. 2' Version available in 20W / 40W (40W AVAILABLE IN 2' AND 4' VERSIONS).
2. Contact factory for custom color temperatures (<3000K / >6000K).
3. Contact factory for battery backup dimensions

2024.02