

HWPX

LED Wall Pack Hazardous Location (CID2 + CIID2)

FEATURES

- Die cast aluminum housing and high impact polycarbonate diffuser
- Compliance to UL844 Class I Division 2, Groups A,B,C,D. Class II Division 2 Groups F,G. Class III. CSA C22.2 No 137
- Operation Temperature -40°C ~ +55°C

SPECIFICATIONS

PERFORMANCE

Watts: 60W

LED Chip: Lumileds

Lumens : 8,855.93LM

LPW: 149.25 lm/W

Input Voltage: 120-277V

CCT: 5000 K

CRI: ≥ 70

Dimming: None

Power Factor: ≥ 90

THD: $\leq 20\%$ Type

Beam Angle: 4-Short



Housing: Diecast Aluminum

Finish: ADC12 Powder coat

Surge Protection 4KV (option 6KV)

IP Rating: IP65

Distribution: Type 4

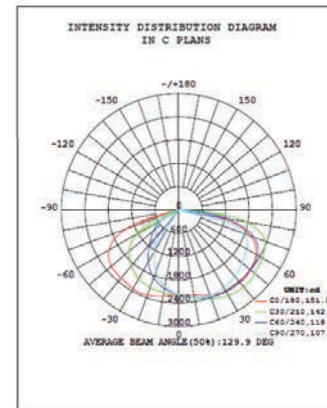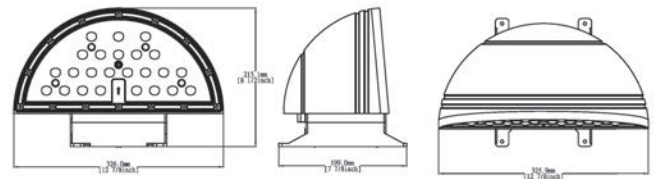

ORDERING INFORMATION

Product Series	Wattage	Voltage	CCT	Finish
HWPX	6 = 60W	LV = 100-277V	3 = 3000K	Black
			4 = 4000K	White
			5 = 5000K	Brown
				Orange
				Yellow