



Job Name: _____

Type: _____

Part #: _____

Notes: _____

LSCAELXTE:

CHICAGO APPROVED LED EDGELIT EXIT SIGNS – SURFACE MOUNT



Illumination

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- UV stabilized, silk screened acrylic panels provide consistent, uniform illumination.
- Single or double face configurations.

Electrical

- Dual 120V/277V.
- Charge rate/power “ON” LED indicator light and push to test switch for mandated code compliance testing.
- Long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Die-cast aluminum mounting canopy provided for universal top, end or back mount.

Housing

- Premium-grade, extruded aluminum housing.

Warranty


- Five year warranty on all electronics and housing. Batteries pro-rated for five years.

Ordering information

Listing

- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

Dimensions

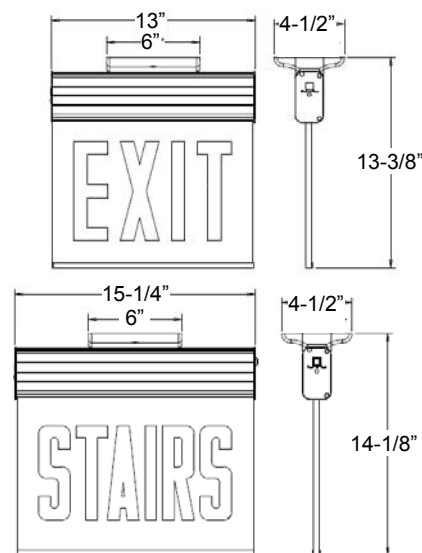

Electrical information

| | Supply Voltage | Max. Watts | Max Amps |
|-----------|----------------|------------|----------|
| AC models | 120V | 4.3W | 0.04A |
| AC models | 277V | 4.7W | 0.02A |
| EM models | 120V | 4.5W | 0.04A |
| EM models | 277V | 4.9W | 0.02A |

| Model | Face # | Letter/Background Color | | Housing Color | Battery | Signage/Directional Arrows | |
|------------|--------|-------------------------|------------------|---------------|------------------|----------------------------|--------------------------|
| | | Letter | Background Color | A Aluminum | Blank AC only | NA | EXIT, no arrow |
| LSCAELXTEU | 1 | Single | | W White | EM Ni-Cd battery | SWNA | STAIRS, no arrow |
| | 2 | Double | RW Red on white | A Aluminum | Blank AC only | DA | EXIT, double arrow |
| | | | | | | SWDA | STAIRS, double arrow |
| | | | | | | RA ¹ | EXIT, right arrow |
| | | | | | | SWRA ¹ | STAIRS, right arrow |
| | | | | | | LA ¹ | EXIT, left arrow |
| | | | | | | SWLA ¹ | STAIRS, left arrow |
| | | | | | | LARA ² | EXIT, left/right arrow |
| | | | | | | SWLARA ² | STAIRS, left/right arrow |

Notes:

1. Available in single face configuration only.
2. Available in double face configuration only.