

| Job Name: | | |
|-----------|--|--|
| Туре: | | |
| Part #: | | |

Notes:

LSCALEDCXTEU

Chicago Approved Steel LED Exit & Emergency Combo STAND



ILLUMINATION

- Long lasting, energy efficient white LED exit sign illumination.
- Single or double face configuration.
- Two 6V 5.3W adjustable white LED lamp heads.

ELECTRICAL

- Dual 120/277 voltage standard. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for
- minimum 120 minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours. Remote capacity 10W available.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.


HOUSING

- Durable 20-gauge steel construction.
- Neutral white or black finish.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for two years. Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA,
- Local and State Codes.
- UL listed for damp locations (20°C 50°C).



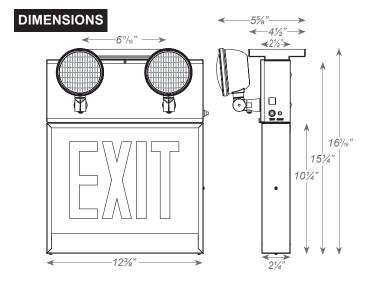

ELECTRICAL INFORMATION

| CATALOG NUMBER | INPUT W | ATTS (W) | INPUT AMPS (A) | | |
|-----------------|---------|----------|----------------|-------|--|
| | 120V | 277V | 120V | 277V | |
| LSCALEDCXTEU | 12 | 13 | 0.12A | 0.06A | |
| LSCALEDCXTEU-RC | 12 | 13 | 0.12A | 0.06A | |

ORDERING INFORMATION

| MODEL | No. of FACES | LETTER HOUSING | | | DUSING | OPTIONS SIGNAGE | | | DIRECTIONAL ARROW | | | | |
|---|---------------|----------------|-----|---|--------|-----------------|-------------------|-----------------------|---------------------|-------------------------|---------------------|-------------------|-------------------|
| LSCALEDCXTEU | 1 Single Face | R | Red | W | White | RC | Remote Capacity | BLANK | Exit | NA | Exit No Arrow | SWLA ¹ | Stairs Left Arrow |
| | 2 Double Face | | | В | Black | | | SW | Stairs | DA | Exit Double Arrow | SWNA | Stairs No Arrow |
| | | | | | | | | RA^1 | Exit Right Arrow | SWDA | Stairs Double Arrow | | |
| Notes: | | | | | | LA ¹ | Exit Left Arrow | SWRA ¹ | Stairs Right Arrow | | | | |
| 1. Available only with single face units. | | | | | | | LARA ² | Exit Left/Right Arrow | SWLARA ¹ | Stairs Left/Right Arrow | | | |

2. Available only with double face units.

2021.02

Specifications subject to change without prior notice. @2020 LSL 24/7. ALL RIGHTS RESERVED