

Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# LSLEDE1

## LED Low Profile, Thermoplastic Emergency Light

### ILLUMINATION

- Adjustable long lasting, efficient, ultra bright white LED lamp heads.
- One, 0.5W white LED per lamp head.
- Unique all-inclusive lamp, reflector and lens assembly.

### ELECTRICAL

- Dual 120/277 voltage standard. Optional dual 120/230 voltage available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Surface mount back plate fits most standard size junction boxes and snaps into place.
- Suitable for wall or ceiling mount.

### HOUSING


- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

### OPTIONS

- SPV: UL Listed for special voltage option.
- HL: Provides increased center-to-center spacing (2.0W per head).



### DIMENSIONS

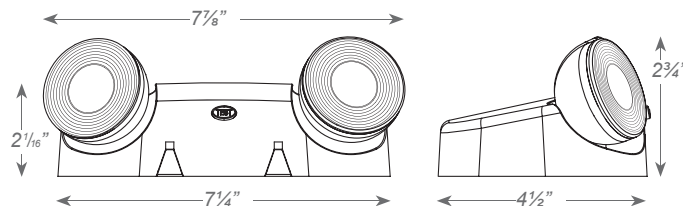

### WARRANTY / LISTING

- One year warranty on all electronics and housing.
- UL Listed for damp locations (0°C – 30°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.



### Spacing

Part #	Mounting Height	Spacing
LSLEDE1	7.5'	14" x 3"
	10'	12" x 3"

### ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)			INPUT AMPS (A)		
	120V	230V	277V	120V	230V	277V
LSLEDE1	0.33	0.33	0.37	0.046	0.044	0.052
LSLEDE1 RC/HL	0.52	0.52	0.60	0.068	0.068	0.070

### ORDERING INFORMATION

#### NOTES:

<sup>1</sup>HL and RC options cannot be combined. 0.5W of remote capacity available standard with -HL option

<sup>2</sup> Ask your LSL Rep For Compatible Remote Heads

MODEL	HOUSING COLOR		OPTIONS	
LSLEDE1	Blank	White	RC	Remote Capacity <sup>1,2</sup>
	B	Black	SPV	120/230 Volt 50/60Hz
			HL	High Lumen LED <sup>1</sup>