



Job Name: _____

Type: _____

Part #: _____

Notes: _____

LSM6-WL

WET LOCATION SEMI-RECESSED POLYCARBONATE EMERGENCY UNIT

ILLUMINATION

- Two fully adjustable, semi-recessed ultra bright, 7.2 watt MR-16 halogen lamp heads standard.
- High performance MR16 halogen lamps with smooth metallized reflector and glass lens for optimal light distribution.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Universal knockout pattern on back plate for wall mount. Snaps into place making internal electrical connections.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in gray or black finish.
- Fully gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, corrosive atmospheres and to water spray or splashing water locations.

OPTIONS

- HTR: Optional internal heater for cold temperature (-9°C – 40°C) applications.
- CW: Optional internal heater and battery blanket for extreme cold temperature applications, (-25°C – 50°C MR-16 halogen) (-25°C – 40°C LED).
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- LED: 3.3W high performance MR-16 base LED lamps for increased center-to-center spacing.
- CEC: Certified to CEC under Title 20 Regulations.
- PLED: 5.0W high performance MR-16 base LED lamps for premium center-to-center spacing

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (20°C – 40°C).


ORDERING INFORMATION

Special voltage options available. Check with your Best Lighting Representative.

¹ Not available with SDT option.



DIMENSIONS

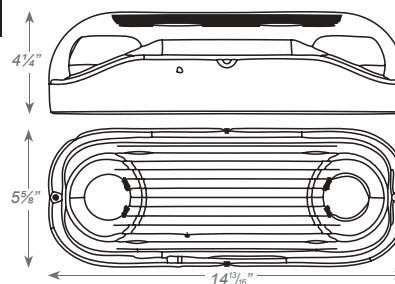

STANDARD



OPTIONAL

Spacing

Mounting Height	8'	10'	12'
LSM6-WL	25'	25'	20'
LSM6-WL-LED	30'	35'	45'
LSM6-WL-PLED	45'	50'	60'

Sample Part Number: LSM6-WP

MODEL	HOUSING COLOR	OPTIONS
LSM6-WL	(BLANK) Gray(STD) B- Black	HTR- Internal Heater CW- Internal Heater With Battery USA- Blanket Assembled IN USA LED- 3.3W High Lumen White LED PLED- Lamps 5.0W High Lumen White CEC- LED Lamps ¹ Title 20 Compliant