



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# LSMRHLED

## LED Outdoor Polycarbonate Remote Head

### ILLUMINATION

- Long lasting, efficient, ultra bright white LED lamp heads.
- 0.5 watt (1 LEDs x 0.5 watt) per head.
- Unique all-inclusive lamp, diffuser and lens assembly.
- Adjustable LED lamp heads provide optimal center-to-center spacing.

### ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

### MOUNTING

- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

### HOUSING

- Engineering grade, high-impact resistant polycarbonate housing.
- Sealed and gasketed in standard gray or black finish.


### WARRANTY / LISTING

- Five year warranty.
- cULus Listed for wet locations (-30°C - 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

STANDARD



### DIMENSIONS

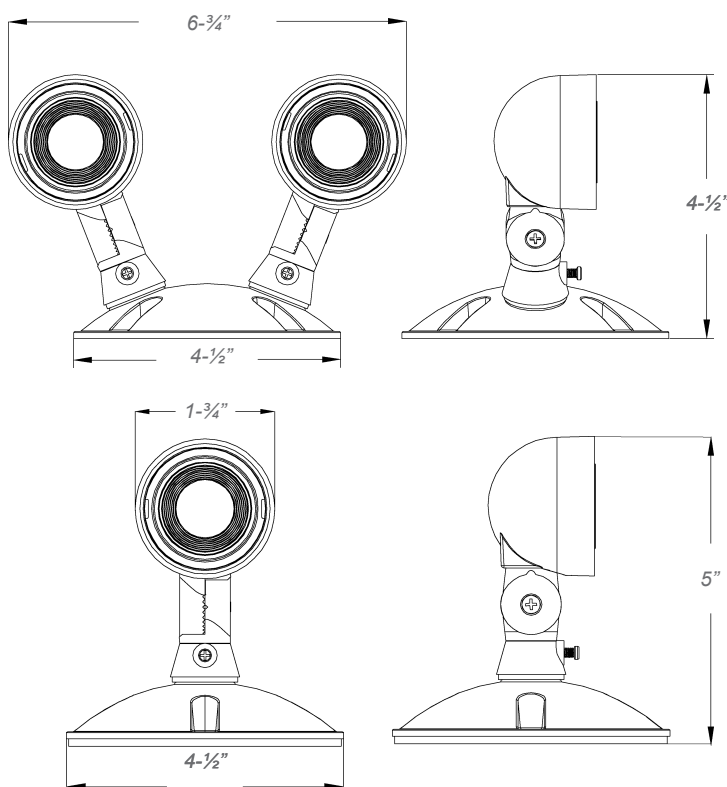

### FIXTURE COMPATIBILITY LIST

Reference individual unit equipment specification sheets for remote load capacity availability.

Best Lighting Model Type		
CEU-RC	CKXTE-RC	EM-RC
CEM-RC	E-1-RC	CTXTE-RC

### ORDERING INFORMATION

Sample Part Number: LSMRHLED1-PWP-3.6V

MODEL	No. of HEADS	COLOR	HOUSING	VOLTAGE
LSMRHLED	1 Single Head	(blank) Gray	PWP Thermoplastic	3.6V For Use With 3.6V DC Power Source
	2 Double Head	B Black		