



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# LSNYEX

## NEW YORK APPROVED APPROVED LED EXIT SIGN

### STANDARD



### ILLUMINATION

- Ultra bright, energy efficient, long life Red LEDs.
- New York City compliant 8" EXIT letters.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.
- Knockout provided for conduit feed applications.

### HOUSING


- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.
- Field removable steel knockout Chevron directional indicators.



### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

### DIMENSIONS

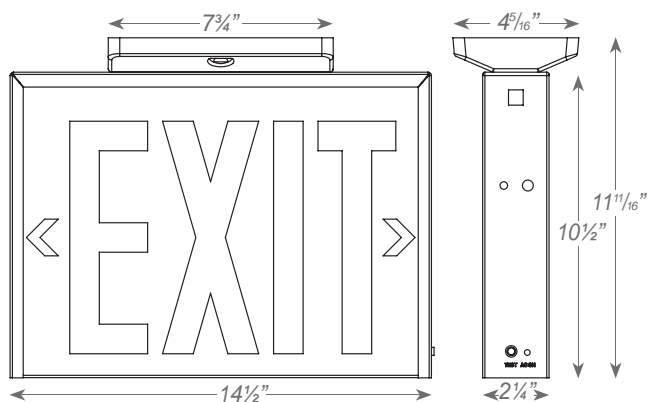

### ORDERING INFORMATION

Sample Part Number: **LSNYXTEU3 RWEM**

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY
LSNYEX	3 Universal Single/ Double Face	R Red	W White B Black	(blank) AC-Only EM Battery Backup