



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# LSNYEXDC

New York City Compliant  
Diecast Aluminum Exit Sign

STANDARD

OPTIONAL



## ILLUMINATION

- Ultra bright, energy efficient, long life red
- LEDs. New York City compliant 8" EXIT letters.

## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

## HOUSING

- Premium-grade, aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.


## OPTIONS

SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.



## DIMENSIONS

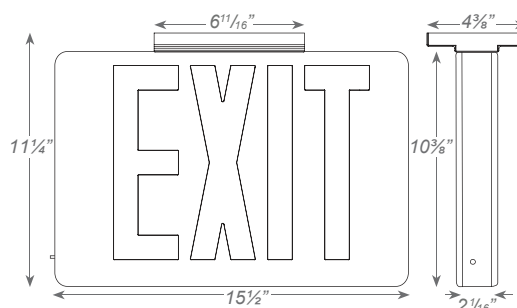

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
LSNYEXDC/EM	5.0	5.0	0.041	0.018

## WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

## ORDERING INFORMATION

Sample Part Number: LSNYEXDC1RBAEM

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	FACE PANEL	BATTERY	OPTIONS
LSNYEXDC	1	Single Face	R Red	W White	(blank) AC-Only	SDT Self-Diagnostics <sup>1</sup>
	2	Double Face		B Black	EM Battery Backup	
	3	Universal Single/Double face		A Aluminum		2C Dual Circuit Operation <sup>2</sup>

<sup>1</sup> Available only with EM units.

<sup>2</sup> Available only with AC units.