

3-CCTSelect (3000K, 4000K, 5000K)

# HTP

## 3-CCT LED Post Top Lantern

### FEATURES

<b>Lumen Output</b>	3300 lumens
<b>Efficacy</b>	Up to 110 lm/W
<b>Input Voltage</b>	100-277V
<b>Dimmable</b>	0-10V Continuous
<b>CCT</b>	Select (3000K, 4000K, 5000K)
<b>Rating</b>	IP65 Wet Location
<b>Warranty</b>	5 Years

**APPLICATIONS:** Premium outdoor luminaire suitable for entrances, building exteriors, parks, and pedestrian walkways.

**CONSTRUCTION:** Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. IP65 Wet Location rated for dust tight, water jets: IEC 60529.

**ELECTRICAL:** Input voltages 100-277V with 0-10V Continuous Dimming. Operating temperatures -40°F to 113°F (-40°C to 45°C). 3-CCT Tuning Switch inside housing cover.

**MOUNTING:** Includes 3 inch Slip-Fit Pole mounting base.

**OPTICS:** Anti-UV Frosted Glass IES /NEMA Type V Lens standard.

**CONTROLS:** Includes NEMA 3-Pin Photocell Sensor Cap.

**LISTINGS:** DLC listed. UL certified to meet US and Canadian standards. FCC and RoHS compliant.


**WARRANTY:** 5 year exclusive limited warranty.




Photocell Sensor Cap



### DIMENSIONS

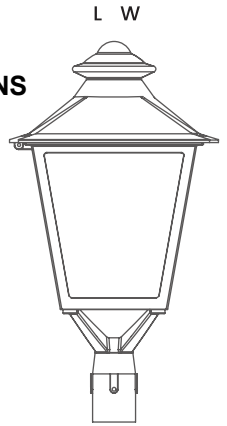
 30W Models  
13.80"L x 13.80"W x 24.92"H

### TUNABLE CORRELATED COLOR TEMPERATURES

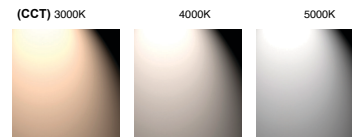

### ORDERING INFORMATION

Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions	Weight
HTP350-30W	30W	100-277V	0.28A@120V, 0.12A@277V	3300	Up to 110 lm/W	Select (3000K, 4000K, 5000K)	0-10V	Black	13.80"L x 13.80"W x 24.92"H	24.25 lbs

## SPECIFICATIONS

### ENERGY DATA

**Input Voltage:** 100-277V

**Input Frequency:** 50/60 Hz

**Wattage:** 30W

**Power Factor:** >0.9

**Total Harmonic Distortion (THD):** <15%

**Operating Temperature:** -40°F to 113°F (-40°C to 45°C)

### LIGHTING DATA

**Lumens:** 3300

**LumensPerWatt:** Upto 110 lm/W

**Color Correlated Temperature (CCT):** Select (3000K, 4000K, 5000K) **Dimmable:** 0-10V

**Color Rendering Index (CRI):** >70

**L70:** 50000 hours

## PHOTOMETRIC CHARACTERISTICS

