



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# LSCEU

## Low Profile All LED Exit & Emergency Combo

### ILLUMINATION

- Adjustable long lasting, efficient ultra bright white LED lamp heads.
- One, 0.5W white LED (42 Lumens) per lamp head
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

### ELECTRICAL

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- EZ-snap thermoplastic mounting canopy included –provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.

### OPTIONS


- SPV: UL Listed for special voltage option.
  - HL: Provides increased center-to-center spacing (2.0W per head).
  - SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- Universal 120-277 voltage.
- RC: Remote capacity of up to 1.0 watts.

### WARRANTY / LISTING

- 5 year warranty on all electronics and housing. Battery prorated for 5 years.
- UL Listed for damp locations (0°C – 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.



### DIMENSIONS

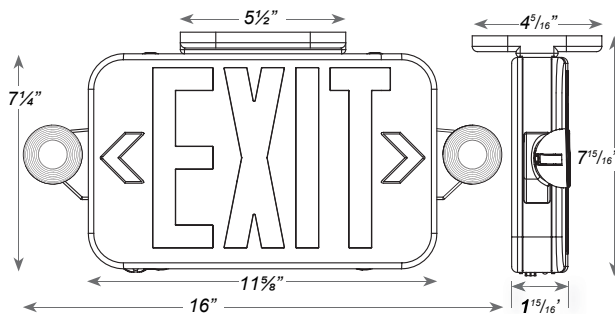

#### STANDARD



#### OPTION



### ORDERING INFORMATION

Sample Part Number: **ECEU3RW**

#### NOTES:

<sup>1</sup> -HL and -RC options cannot be combined. 0.5W of remote capacity available standard with -HL option

<sup>2</sup> Not available with RG units.

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
LSCEU	3	Universal Single/Double Face	RG Red/Green	RC Remote Capacity <sup>1</sup>
			W White	HL High Lumen LED <sup>1</sup>
			B Black	SDT Self-Diagnostics <sup>2</sup>
				SPV 120/230 Volt 50/60Hz <sup>2</sup>



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

**ELECTRICAL INFORMATION**

CATALOG NUMBER	INPUT WATTS (W)			INPUT AMPS (A)		
	120V	230V	277V	120V	230V	277V
LSCEU RED/GREEN	1.2	1.2	1.2	0.12	0.12	0.12
LSCEU RED/GREEN RC/HL	1.2	1.2	1.2	0.12	0.12	0.12
LSCEU RED SDT	2.5	-	2.5	0.05	-	0.05
LSCEU RED SDT RC/HL	3.0	-	3.0	0.05	-	0.05
LSCEU GRN SDT RC/HL	2.7	-	2.7	0.05	-	0.05

**REMOTE LAMP COMPATIBILITY**

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
			RHLED	MRHLED	RH16LED	RH16		RH		RHR		SRH		SRHLED	
			MV			6V	12V	6V	12V	6V	12V	6V	12V		
LSCEURC	3.6V	1W	x	x											
LSCEUHL	3.6V	0.5W		x											